


Engineering Data

Pressure/Temperature Rating acc. to DN 2401

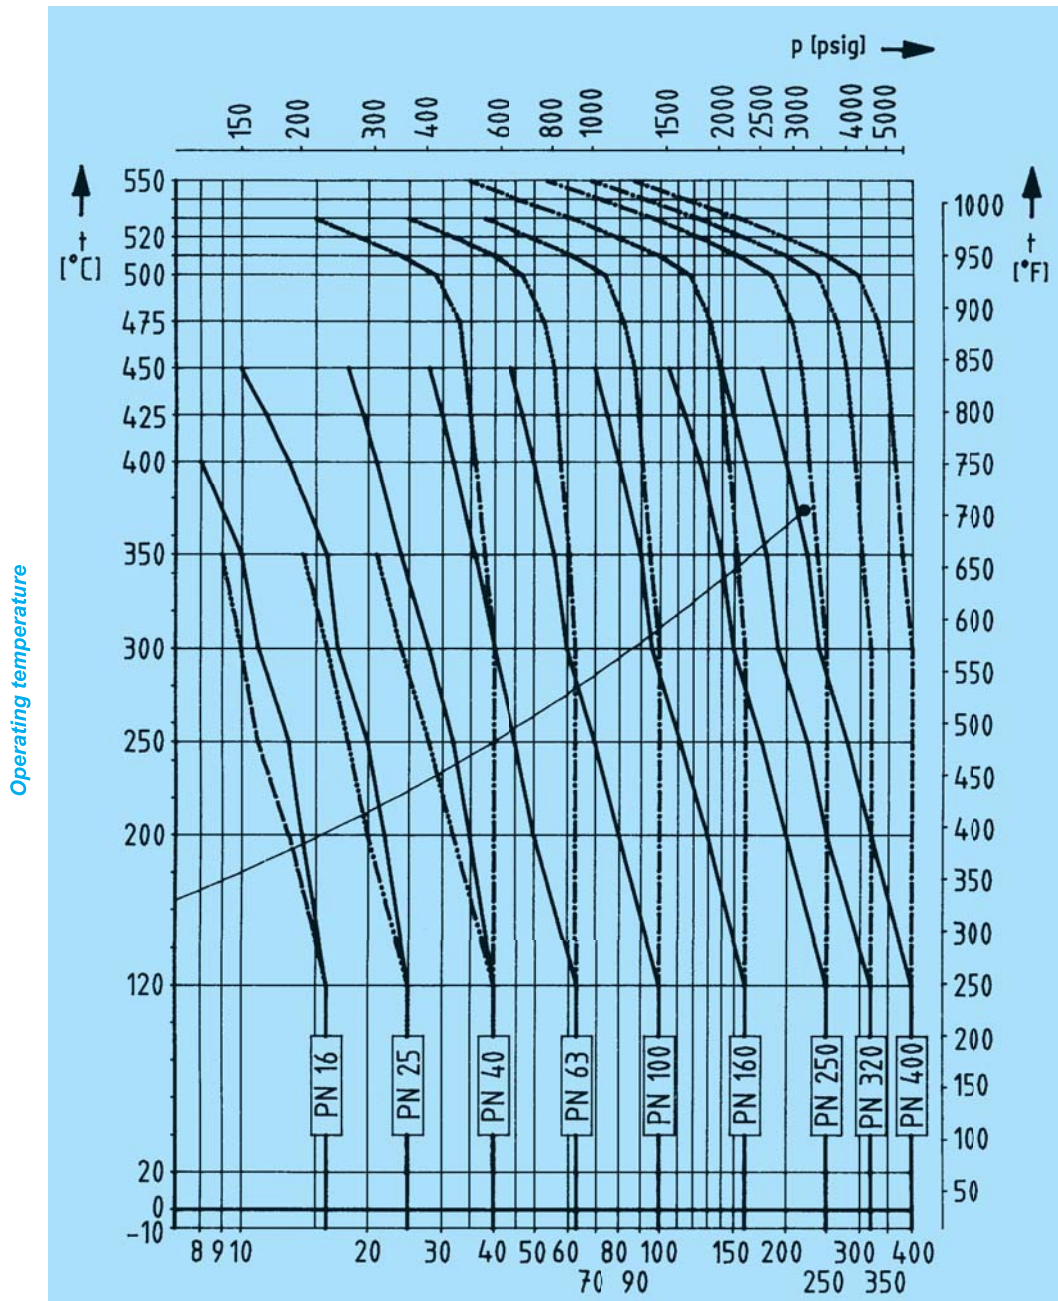

Set pressure p (bar/bar g)

- G17 CrMo 5-5, 13 CrMo 4-5
- GG 25
- GP 240 GH, C 22.8
- Sattdampflinie (kritischer Punkt: 374,15 °C/221,2 bar)
- (t > 400 °C: nach/acc. DIN EN 10213-2)
- Saturated steam (critical point: 705,47 °F/3207,4 psig)
- GGG 40.3